


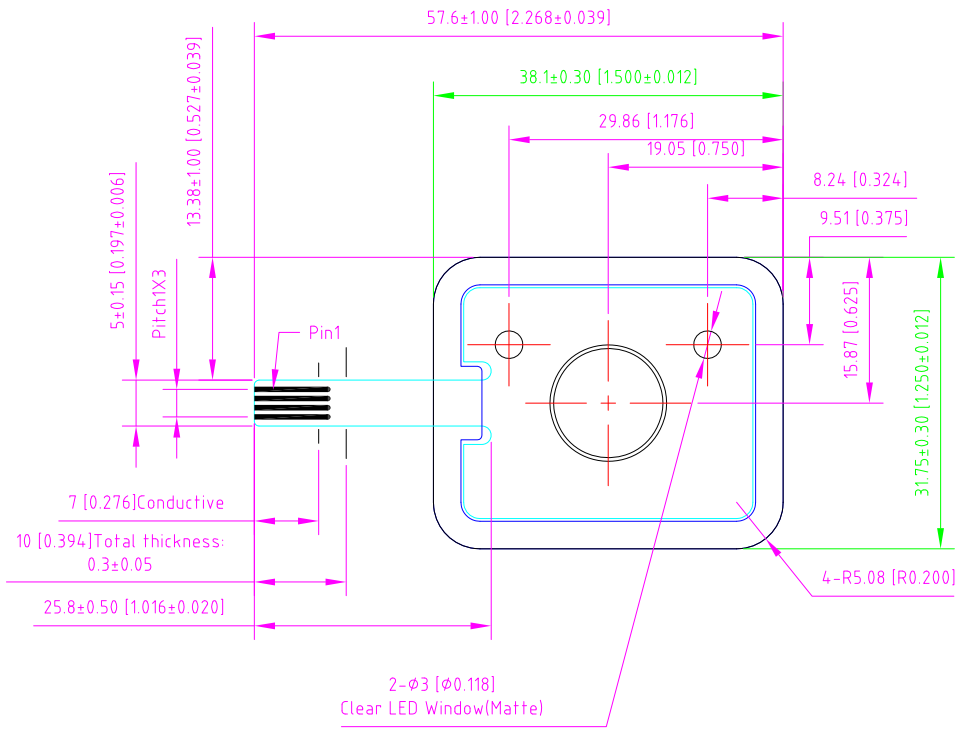


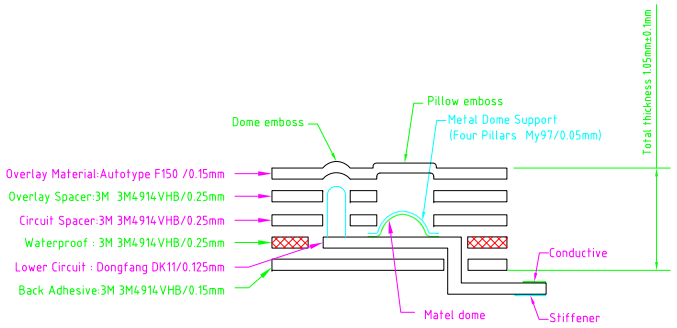

Structural Drawing

Pressure on Adhesive: .81 kg/cm2
Temperature: 50℃
Dwell Time: 5 min

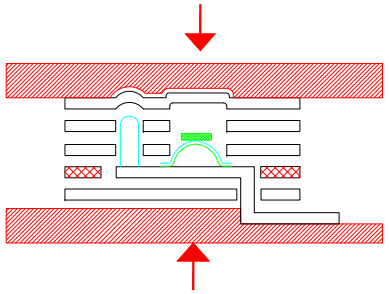

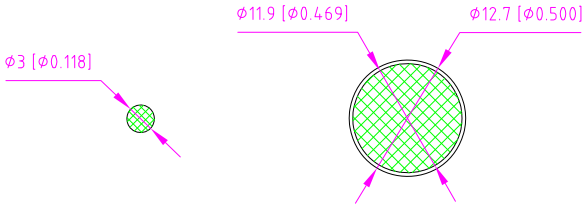


QTY=2

QTY=1

All green areas are emboss

AXE004-22A PRODUCT DRAWING				REVISED VERSION	R2	UNIT: [INCH AND MM]	TOLERANCES OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	WYP	DATE	2017/09/14	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	1 OF 4	DO NOT SCALE THIS DOCUMENT	


ALMAX
ELECTRONIC INTERFACE SOLUTIONS

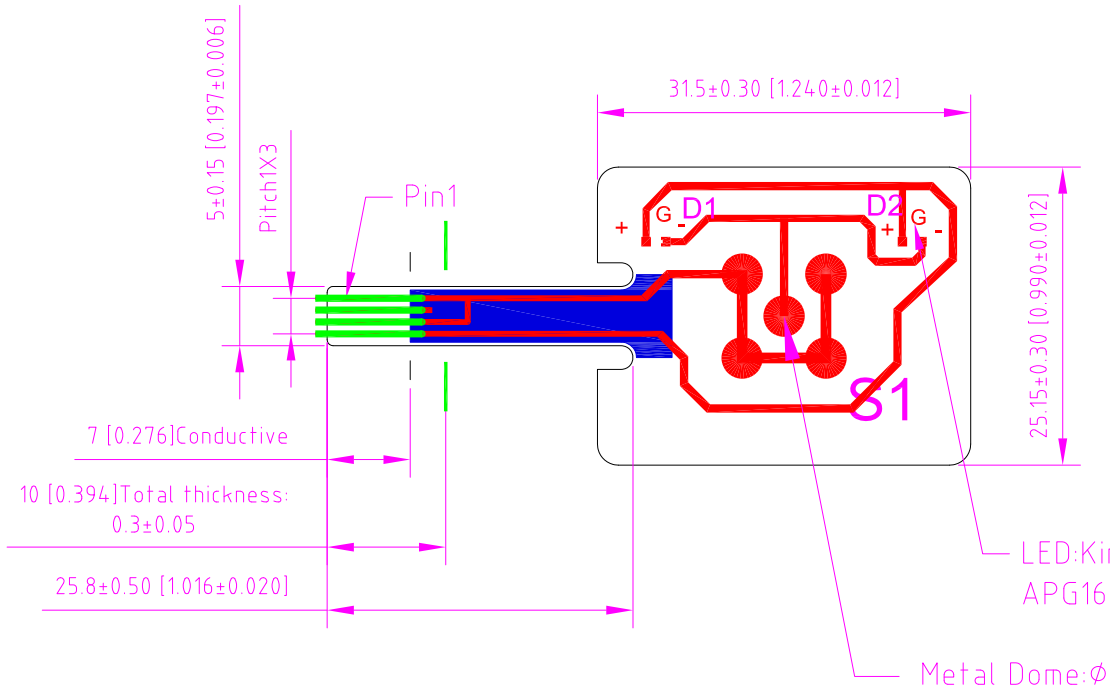


PIN OUT
PIN 1: D1 D2(-) S1
PIN 2: NC
PIN 3: D1 D2(-) S1
PIN 4: S1 D1 D2(+)

AXE004-22A CIRCUIT DRAWING				REVISED VERSION	R2	UNIT: [INCH AND MM]	TOLERANCES OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	WYP	DATE	2017/09/14	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	2 OF 4	DO NOT SCALE THIS DOCUMENT	


ALMAX ELECTRONIC INTERFACE SOLUTIONS

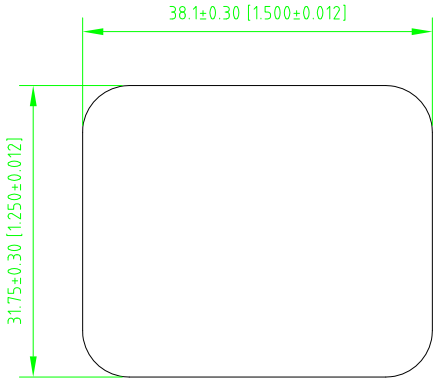


Overlay

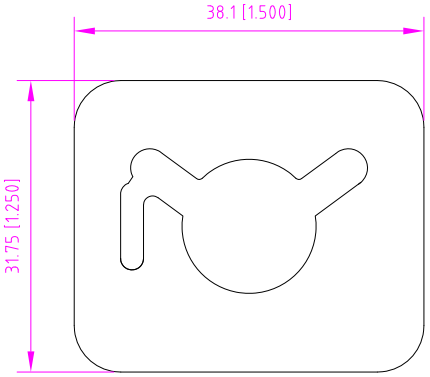


Overlay Spacer

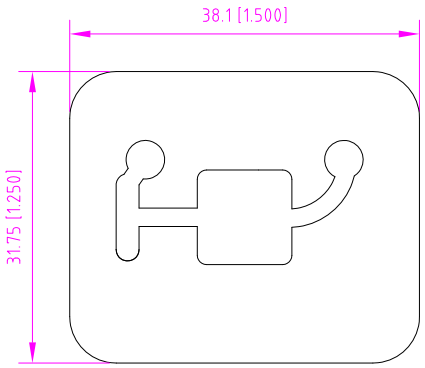


Circuit Spacer

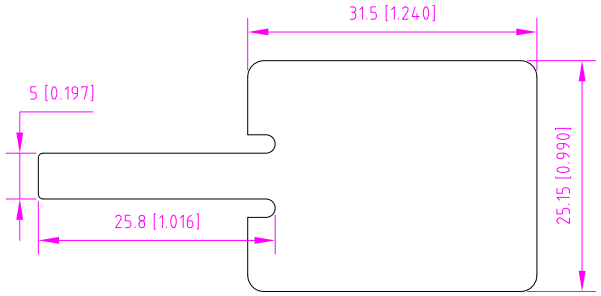

Lower Circuitm

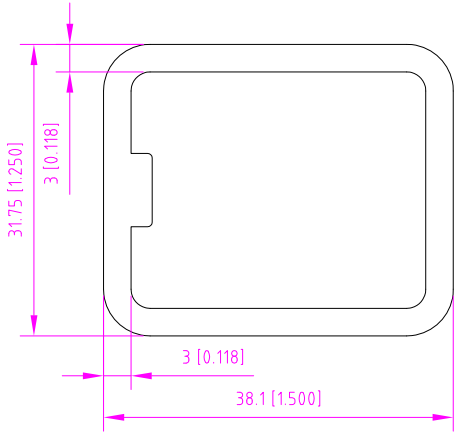

Waterproof

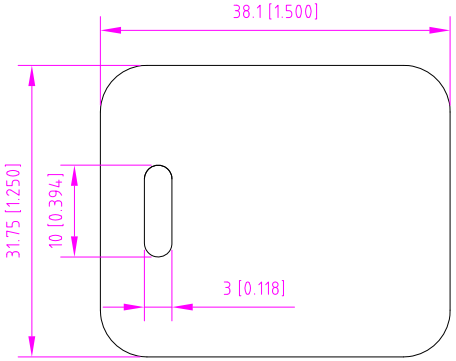

Back Adhesive

AXE004-22A OUT-LINEDRAWING				REVISED VERSION	R2	UNIT: [INCH AND MM]	TOLERANCES OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	WYP	DATE	2017/09/14	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	3 OF 4	DO NOT SCALE THIS DOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS



Clear LED window * 2



Matte area

Black

Pantone 877 C

Pantone 360 C

Pantone876C

Pantone 287 C

AXE004-22A OVERLAY DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM . XX ±0.35MM . XXX ±0.25MM ANGLES ± 1
DESIGN	WYP	DATE	2017/09/14	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVEDBY		DATE		SHEET:	4 OF 4	DONOTSCALETHISDOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS