


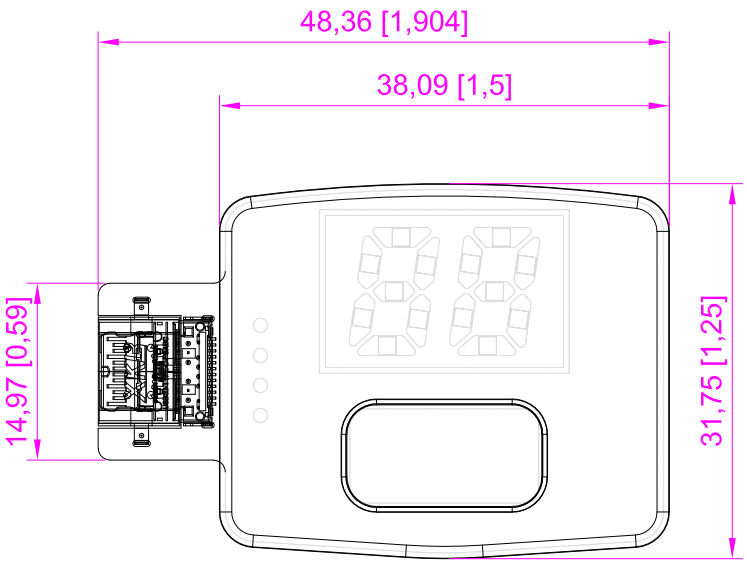





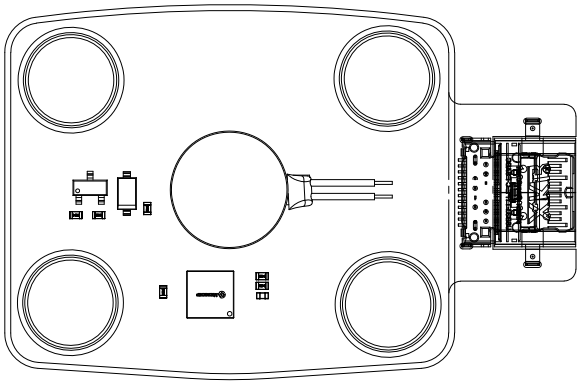

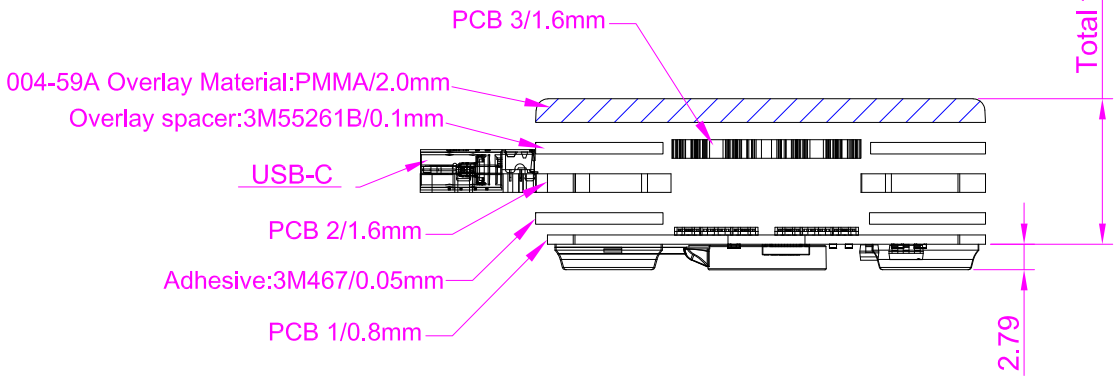


AXE004-34B PRODUCT DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCES L<16 ±0.15MM 16<L<40 ±0.2MM 40<L<63 ±0.25MM 63<L<100 ±0.35MM 100<L<160 ±0.4MM 160<L ±L*0.3%MM
DESIGN	WYP	DATE	2025-11-6	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	1 OF 6	DO NOT SCALE THIS DOCUMENT	


ALMAX ELECTRONIC INTERFACE SOLUTIONS

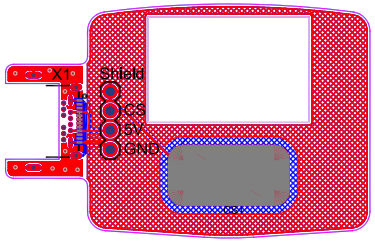

Composite view

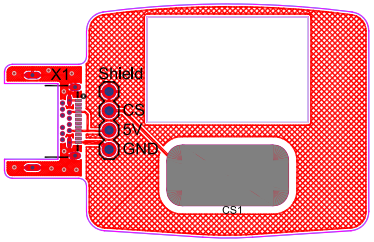


Copper Layer 1

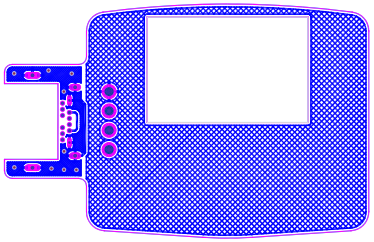


Copper Layer 2

PCB Material: FR-4, 1.6mm,
2 sides ,1 OZ Cu;
Finish: ENIG
White Print Text ,
Green Solder mask on Both Side

PCB 2




Composite view



Copper Layer 1

PCB Material: FR-4, 0.8mm,
2 sides ,1 OZ Cu;
Finish: ENIG
White Print Text ,
Green Solder mask on Both Side





Copper Layer 2


PCB 1


AXE004-34B CIRCUIT DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	WYP	DATE	2025-11-6	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	2 OF 6	DO NOT SCALE THIS DOCUMENT	

ALMAX
ELECTRONIC INTERFACE SOLUTIONS



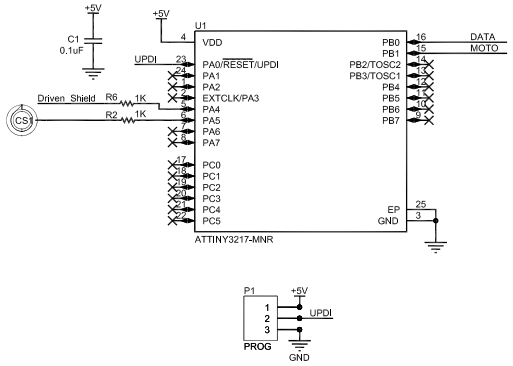




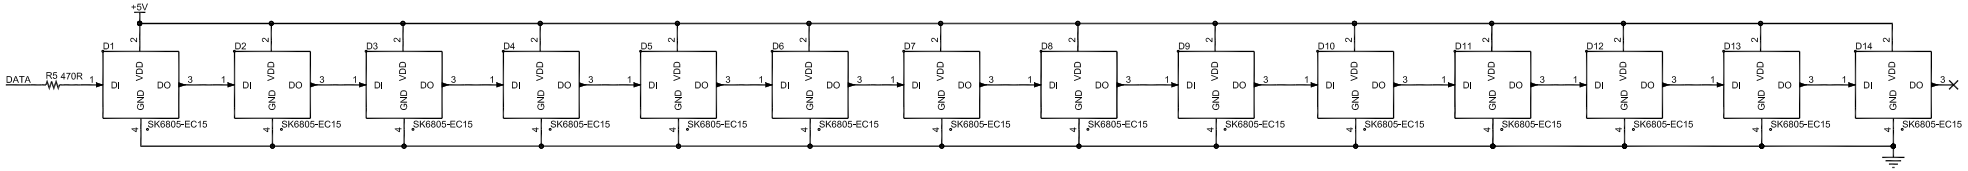


AXE004-34B SCHEMATIC DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	WYP	DATE	2025-11-6	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	3 OF 6	DO NOT SCALE THIS DOCUMENT	


ALMAX ELECTRONIC INTERFACE SOLUTIONS

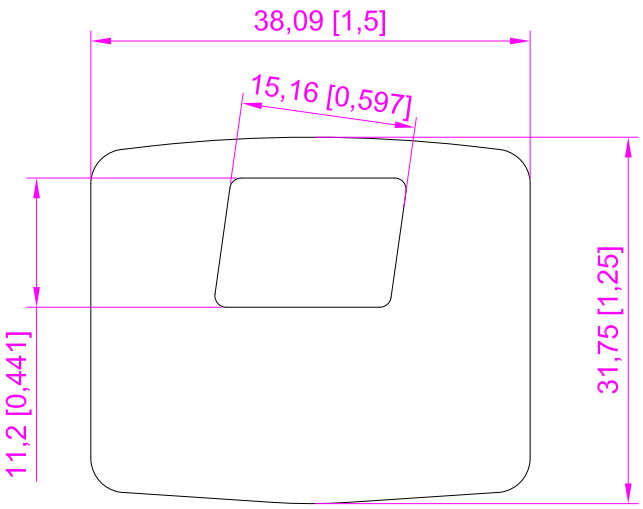


Overlay spacer

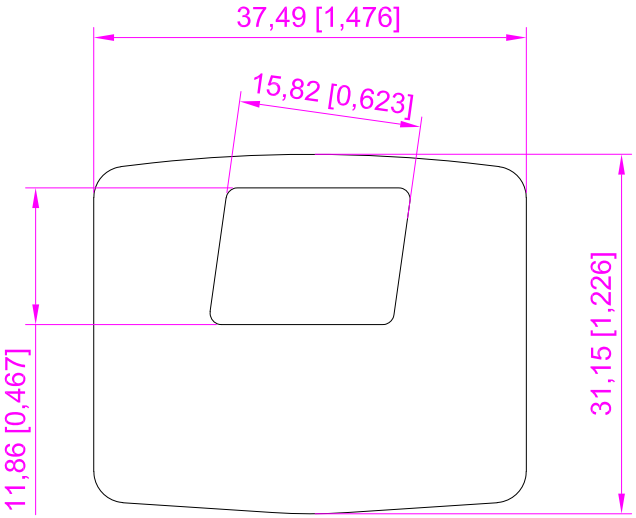


Adhesive

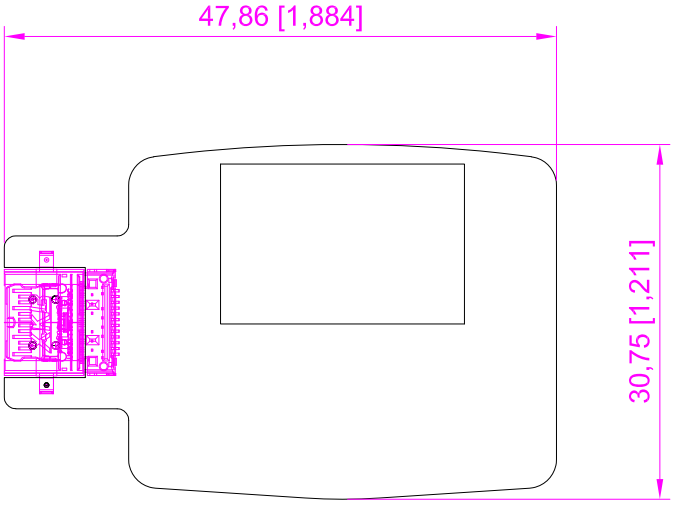

PCB 2

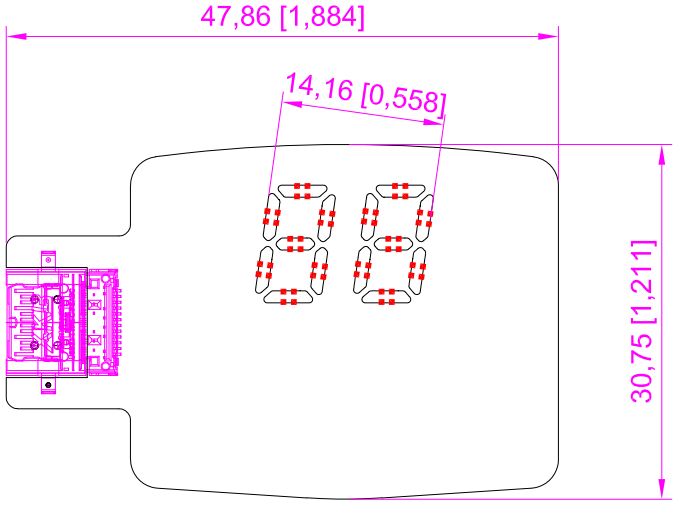


PCB 1





PCB 3


AXE004-34B OUT-LINE DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	WYP	DATE	2025-11-6	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	4 OF 6	DO NOT SCALE THIS DOCUMENT	


ALMAX ELECTRONIC INTERFACE SOLUTIONS

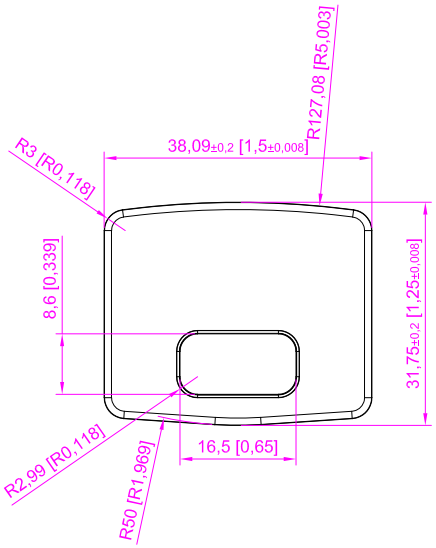






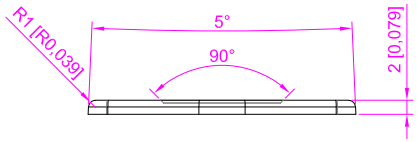





NOTES:
1. LENS MATERIAL: PLEXIGLAS 8N
(POLYMER, CLEAR, AMORPHOUS, LIGHT TRANSMITTANCE > 85%,
LOW BIREFRINGENCE, 6H PENCIL HARDNESS OR HIGHER)
2. FINISH: SPI A-1 #3 DIAMOND BUFF ON ALL SURFACES

AXE004-34B(59A) LENS DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCES L<16 ±0.15MM 16<L<40 ±0.2MM 40<L<63 ±0.25MM 63<L<100 ±0.35MM 100<L<160 ±0.4MM 160<L ±L*0.3%MM
DESIGN	WYP	DATE	2025-11-6	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	5 OF 6	DO NOT SCALE THIS DOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS



Pantone Process Black

Pantone 1235 C

Translucent Black

Pantone Cool Gray 4 C

AXE004-34B OVERLAY DRAWING				REVISED VERSION	R2	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM . XX ±0.35MM . XXX ±0.25MM ANGLES ± 1
DESIGN	WYP	DATE	2025-11-6	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVEDBY		DATE		SHEET:	6 OF 6	DONOTSCALETHISDOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS