



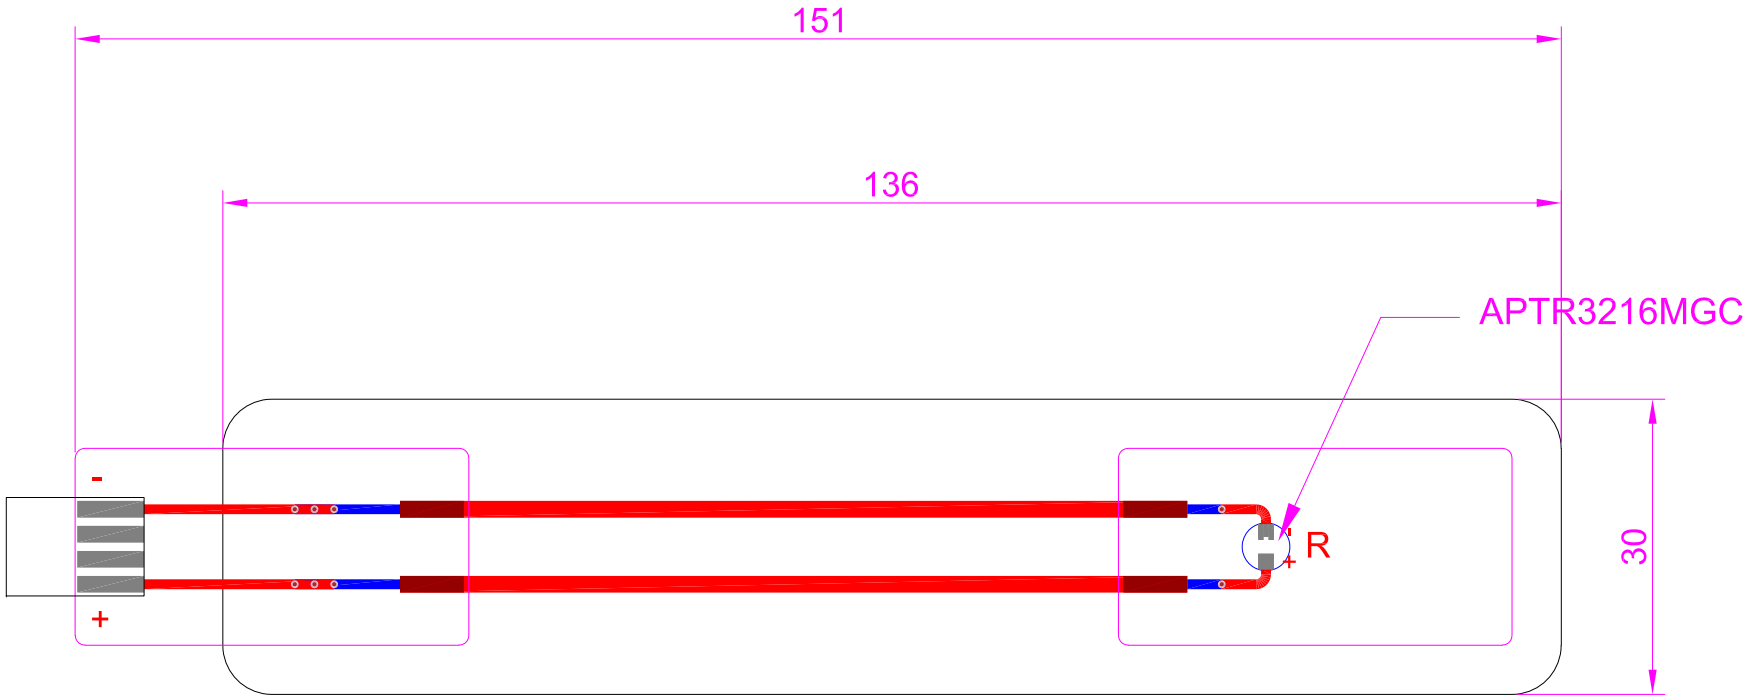


Female Pin:11506-12
Housing:2802H-04

AXE004-60C PRODUCT DRAWING				REVISED VERSION	R1	UNIT: [MM AND INCH]	TOLERANCES L<16 ±0.15MM 16<L<40 ±0.2MM 40<L<63 ±0.25MM 63<L<100 ±0.35MM 100<L<160 ±0.4MM 160<L ±L*0.3%MM
DESIGN	WYP	DATE	2025-6-5	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	1 OF 2	DO NOT SCALE THIS DOCUMENT	

ALMAX
ELECTRONIC INTERFACE SOLUTIONS

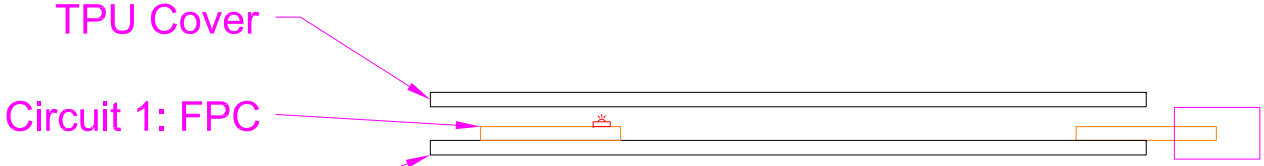

FPC: thickness 0.188mm,2side 0.5OZ Cu,ENIG RA

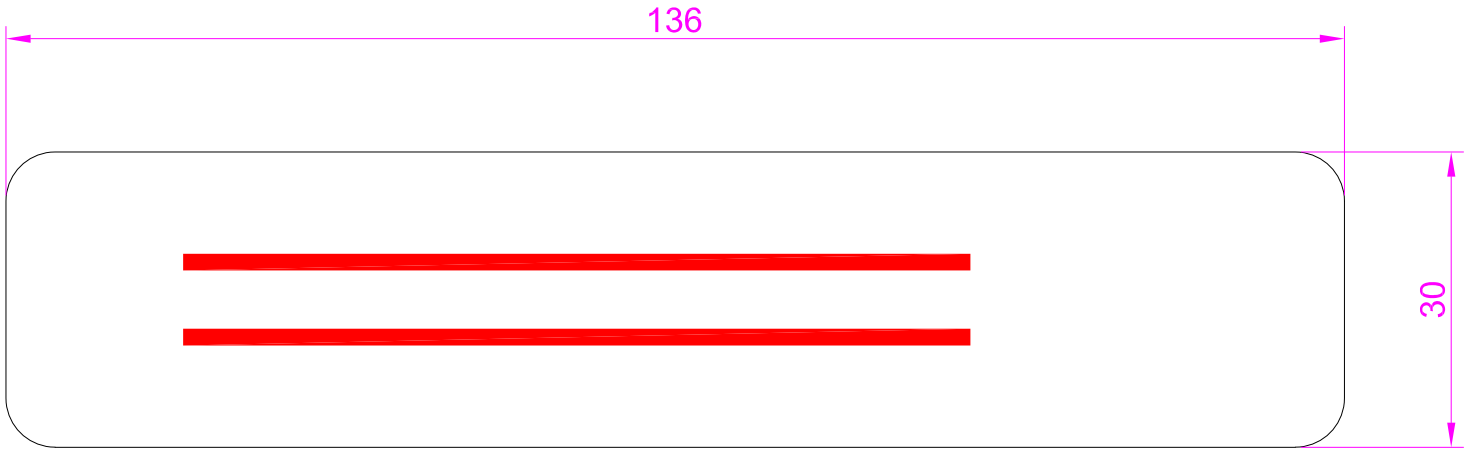

1 pass of silver paste: CI-1096

AXE004-60C PRODUCT DRAWING				REVISED VERSION	R1	UNIT: [MM AND INCH]	TOLERANCES L<16 ±0.15MM 16<L<40 ±0.2MM 40<L<63 ±0.25MM 63<L<100 ±0.35MM 100<L<160 ±0.4MM 160<L ±L*0.3%MM
DESIGN	WYP	DATE	2025-6-5	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	2 OF 2	DO NOT SCALE THIS DOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS