

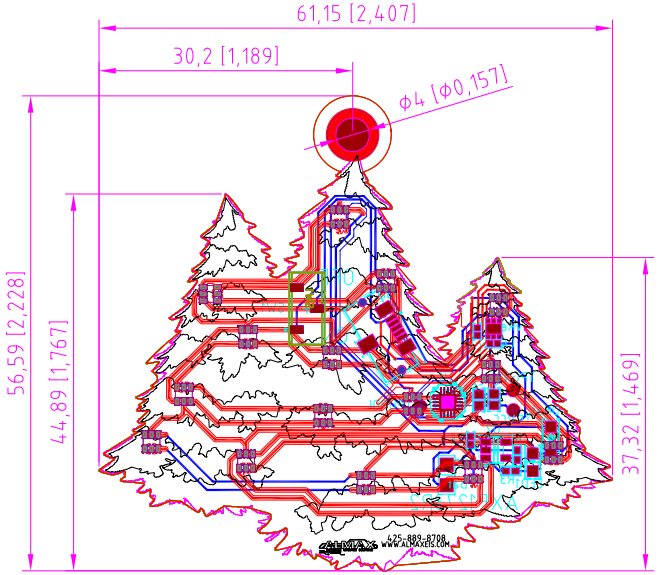


Full View

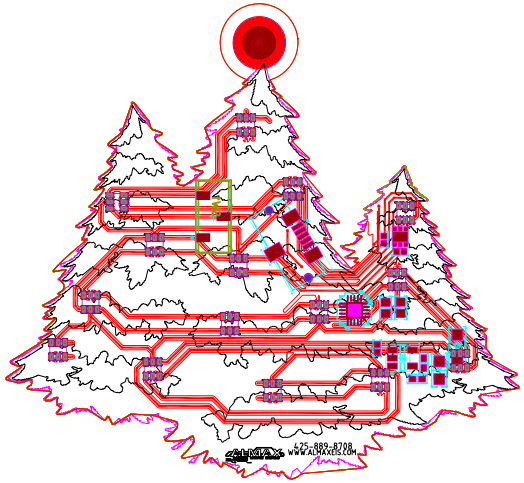


Copper Layer1

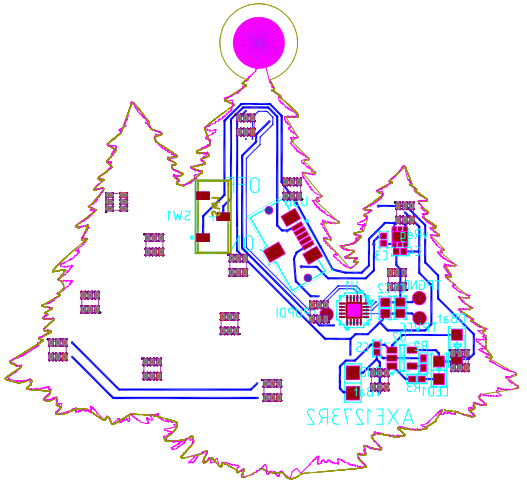



Copper Layer2

PCB: thickness 1.6mm,2side FR4,1OZ Cu,Plated gold,green solder mask,white text.



Battery Spacer: DT6125/0.225mm

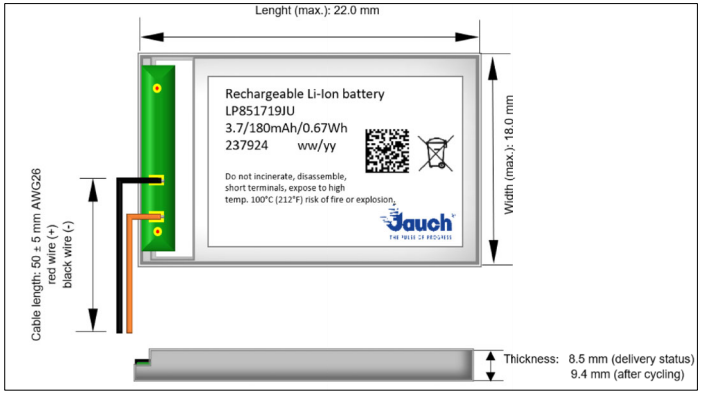


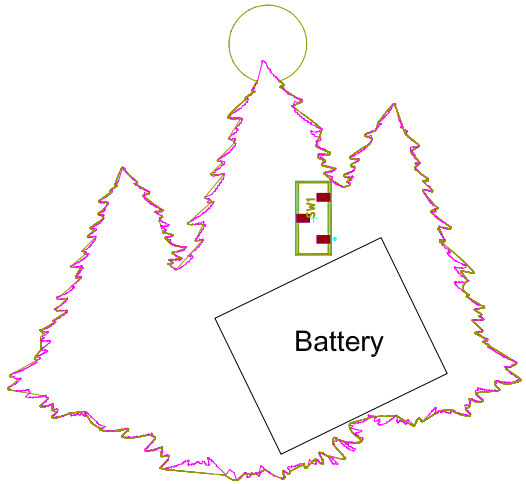

BOTTOM


AXE1273 Main PCB				REVISED VERSION	R3	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	Rick	DATE	2020-10-27	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	1 OF 3	DO NOT SCALE THIS DOCUMENT	


ALMAX ELECTRONIC INTERFACE SOLUTIONS

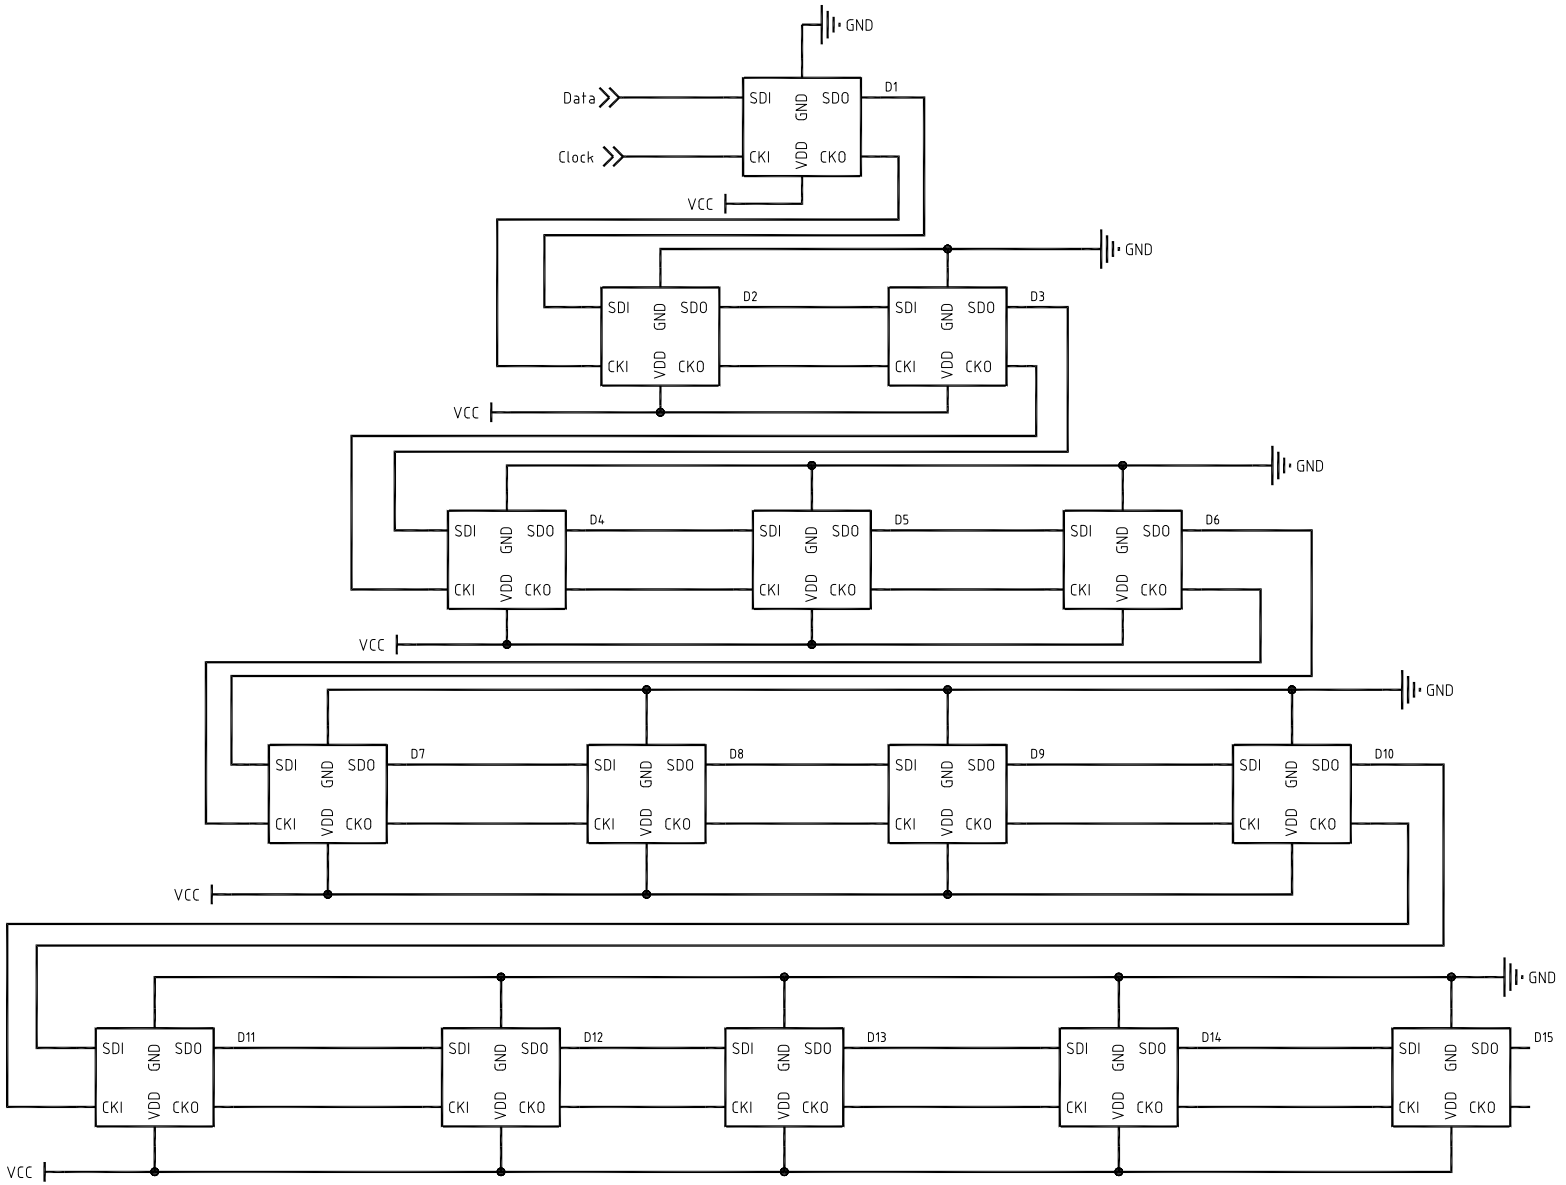



AXE1273 LEDs SHC				REVISED VERSION	R3	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	Rick	DATE	2020-10-27	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	2 OF 3	DO NOT SCALE THIS DOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS

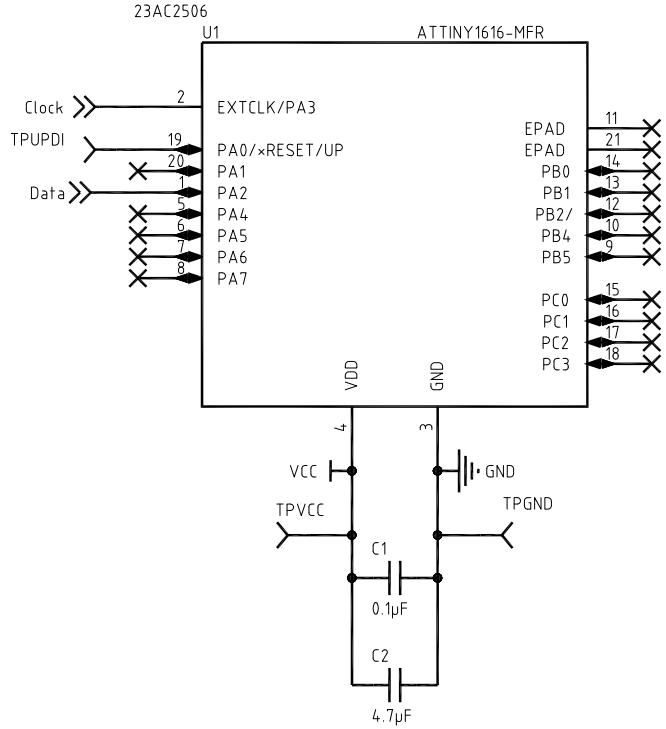

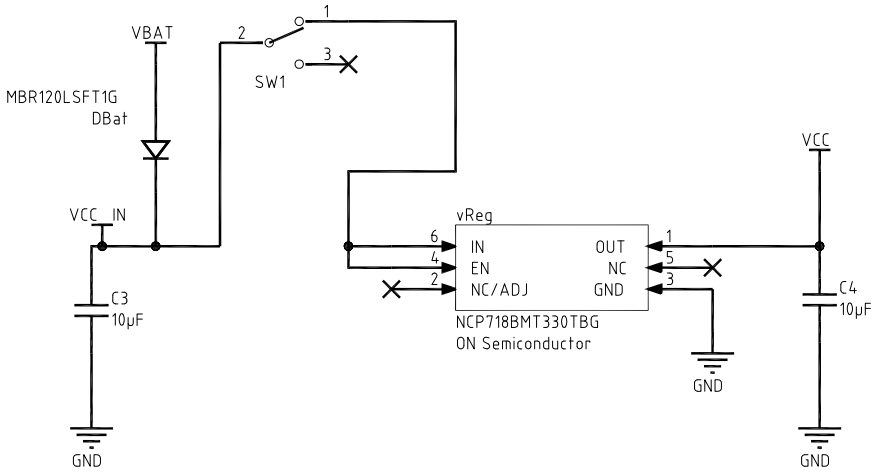



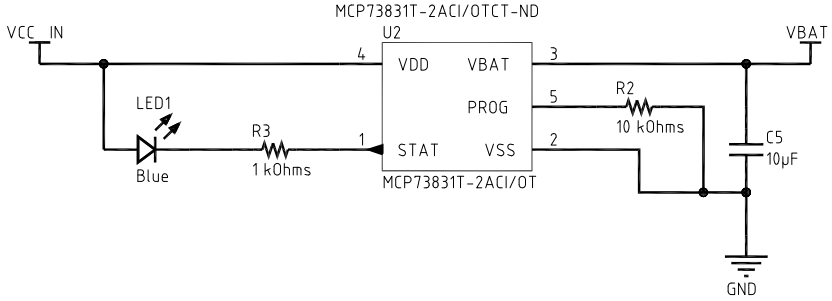

AXE1273 Main_PCB SHC				REVISED VERSION	R3	UNIT: [MM AND INCH]	TOLERANCERS OUTLINE .X ±0.5MM .XX ±0.35MM .XXX ±0.25MM ANGLES ± 1°
DESIGN	Rick	DATE	2020-10-27	SCALE	1:1		
CHECK		DATE		CUST.P/N			
APPROVED BY		DATE		SHEET:	3 OF 3	DO NOT SCALE THIS DOCUMENT	

ALMAX ELECTRONIC INTERFACE SOLUTIONS